NANJING EFG CO.,LTD.

Fiberglass Facing Tissue

PRODUCT DESCRIPTION

Fiberglass facing tissue is used for a new decorative substrate for mineral products, cotton, board, and glass curtain wall. Widely used for public entertainment, star hotels, shopping malls, conference hall, offices, residential, etc. Facing tissue coated with paint has the characteristics of fire resistance, waterproof, anti-mildew, germ-proof, and anti-cracking. It is a good substrate for building decorative materials.

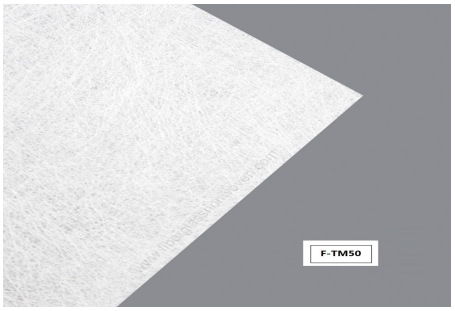



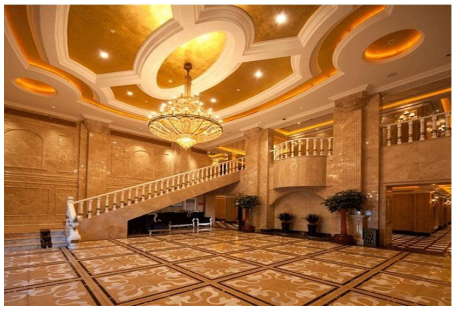



CHARACTERISTICS

- Fiber Uniformly Dispersed
- Smooth Surface, Less Wool Yarn
- Easy to Coating a Variety of Paints
- Advantage of Sound-proof, Flame Retardant, Antiseptic, etc

TECHNICAL DATA

Product Code	Unit Weight	LOI	MD Tensile Strength	CD Tensile Strength	Wet Tensile Retention MD	Moisture Content
	g/m2	%	N/5CM	N/5CM	%	%
F-TM40	40	≤25	≥130	≥55	≥60	≤ 1.0
F-TM50	50	≤25	≥150	≥70	≥60	≤ 1.0
F-TM100	100	≤25	≥450	≥250	≥60	≤ 1.0
Testing Basis	ISO3374	ISO 1887	ISO3342	@25℃/10min	ISO 3344	
Paper core diameter: 152/305mm						

Remark: 1. Other specification can be customized according to customer’ s demand.
2. The technical data above is for reference only.

PACKING

Every roll in plastic film without pallet.

STORAGE

This product should be stored in a dry, ventilated, and rainproof place, with temperatures from 5°Cto 35°C and humidity between 35% and 65%. It is recommended to be kept in the intact package when not used to avoid damp.

Version #: No.202109

Address: No.20 Jiangjun Ave., Nanjing, P.R. China
URL: www. njefg.com
E-mail: sales@njefg.com
Fax: +86 25 58321442
Tel : +86 25 52270147
Mobile : 0086 18851651909 (WhatsApp)